Technical data

- Rated pressure: 300 PSI (20,6 bar)

Materials

- Body: forged brass CuZn40Pb2 in accordance with European Standard EN 12165 CW617N, similar to American Standard ASTM B124 C37700
- Stopper: forged brass CuZn40Pb2 in accordance with European Standard EN 12165 CW617N, similar to American Standard ASTM B124 C37700
- Stem: brass EN 12164 CW617N 1-1/2" models; CW713R for 2-1/2" models
- Handwheel: red painted aluminum


Approvals: A55E, A56E, A55EG, A56EG

FM APPROVED

c UL US LISTED HOSE VALVES 618R


Dimensions

A55E

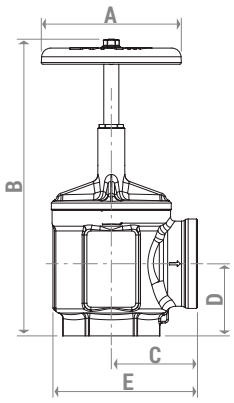


SIZE	A	B		C	D	E
		CLOSED	OPEN			
1-1/2" x 1-1/2"	4-1/32"	6-1/2"	7-19/32"	2-5/32"	1-7/8"	3-11/16"
2-1/2" x 2-1/2"	5-1/8"	8-29/32"	10-19/32"	3-5/32"	2-5/8"	5-11/32"

A56E

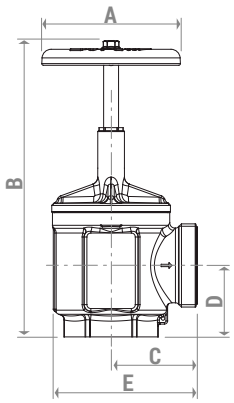


SIZE	A	B		C	D	E
		CLOSED	OPEN			
1-1/2" x 1-1/2"	4-1/32"	6-1/2"	7-19/32"	2-1/4"	1-7/8"	3-13/16"
2-1/2" x 2-1/2"	5-1/8"	8-29/32"	10-19/32"	3-3/16"	2-5/8"	5-3/8"

A55EG

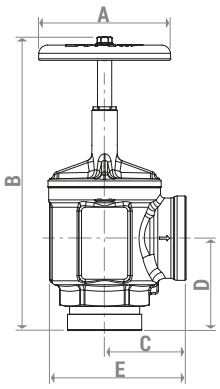

SIZE	A	B		C	D	E
		CLOSED	OPEN			
2-1/2" x 2-1/2"	5-1/8"	9-25/32"	11-1/2"	3-5/32"	3-9/16"	5-11/32"

A56EG

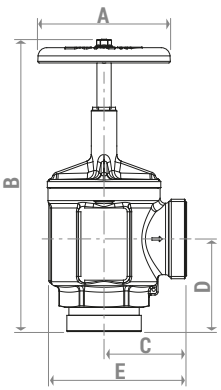

SIZE	A	B		C	D	E
		CLOSED	OPEN			
2-1/2" x 2-1/2"	5-1/8"	9-25/32"	11-1/2"	3-3/16"	3-9/16"	5-3/8"

Giacomini S.p.A.
Via per Alzo 39, 28017 San Maurizio d'Opaglio (NO) Italia
consulenza.prodotti@giacomini.com
+39 0322 923372 - giacomini.com