

Dimensions

A61 (Rp-F x Rp-F)

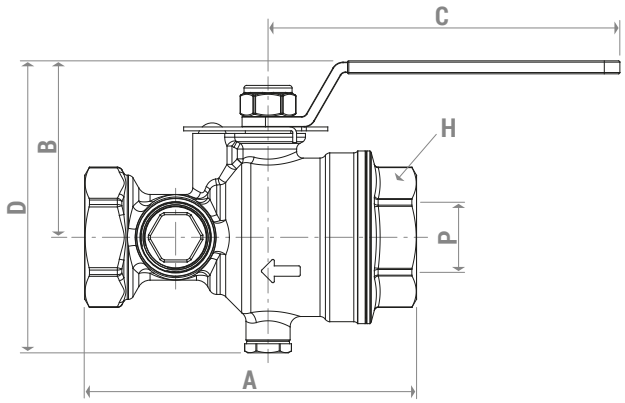


SIZE	C (PLUG)	P (PORT)	A	B	C	D	H
1"	1/4"	1-1/16"	5-1/18"	2-43/64"	5-11/32"	4-27/64"	1-57/64"
1-1/4"	1/4"	1-1/16"	5-7/16"	2-43/64"	5-11/32"	4-27/64"	1-57/64"
1-1/2"	1/4"	1-18/32"	6-3/16""	4"	6-26/32"	4-21/64"	2-40/64"
2"	1/4"	1-12/16"	6-21/32""	4"	6-26/32"	4-21/64"	2-40/64"

A61 (NPT-F x NPT-F)

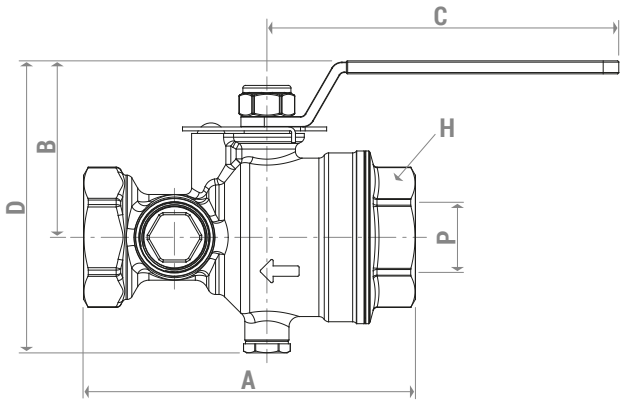

SIZE	C (PLUG)	P (PORT)	A	B	C	D	H
1"	1/4"	1-1/16"	5-1/32"	2-43/64"	5-11/32"	4-27/64"	1-57/64"
1-1/4"	1/4"	1-1/16"	5-1/32"	2-43/64"	5-11/32"	4-27/64"	1-57/64"
1-1/2"	1/4"	1-18/32"	6-6/32"	4"	6-26/32"	6-21/64"	2-40/64"
2"	1/4"	1-12/16"	6-6/32"	4"	6-26/32"	6-21/64"	2-40/64"

A61 (Groove x Groove)

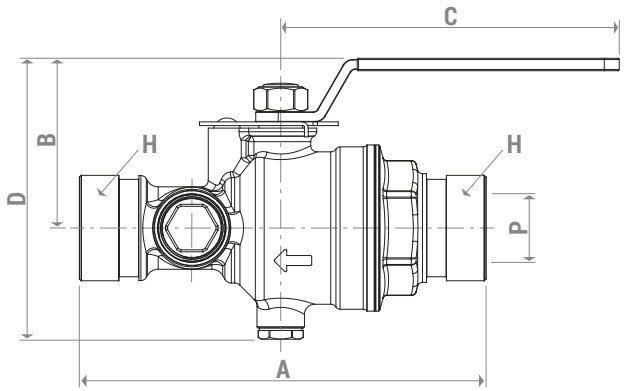

SIZE	C (PLUG)	P (PORT)	A	B	C	D	H
1-1/4"	1/4"	1-1/16"	6-13/32"	2-43/64"	5-11/32"	4-27/64"	1-1/4" GROOVE
2"	1/4"	1-12/16"	7-17/32"	4"	6-26/32"	6-21/64"	2" GROOVE

Product specifications

A61

Test and drain valve for sprinkler systems combines the functions of test and drain for wet sprinkler systems. In compliance with the requirements of NFPA-13, NFPA13R and NFPA-13D and with FM and UL 258:2025 for fire protection applications with water.

Main feature as following:

- Rp, EN 10226 threads 1", 1-1/4", 1-1/2", 2"
- NPT threads 1", 1-1/4", 1-1/2", 2"
- Groove connections 1-1/4", 2"
- Forged DZR UNI EN 12165 CW602N brass body
- Chrome plated brass ball
- PTFE seats
- Single handle ball valves with three working positions
- Tamper resistant test orifice and sight glass included.

⚠ Safety Warning. Installation, commissioning and periodical maintenance of the product must be carried out by qualified operators in compliance with national regulations and/or local standards. A qualified installer must take all required measures, including use of Individual Protection Devices, for his and others' safety. An improper installation may damage people, animals or objects towards which Giacomini S.p.A. may not be held liable.

♻ Package Disposal. Carton boxes: paper recycling. Plastic bags and bubble wrap: plastic recycling.

ℹ Additional information. For more information, go to giacomini.com or contact our technical assistance service. This document provides only general indications. Giacomini S.p.A. may change at any time, without notice and for technical or commercial reasons, the items included herewith. The information included in this technical sheet do not exempt the user from strictly complying with the rules and good practice standards in force.

🗑 Product Disposal. Do not dispose of product as municipal waste at the end of its life cycle. Dispose of product at a special recycling platform managed by local authorities or at retailers providing this type of service.

GIACOMINI
WATER E-MOTION

Giacomini S.p.A.
Via per Alzo 39, 28017 San Maurizio d'Opaglio (NO) Italia
consulenza.prodotti@giacomini.com
+39 0322 923372 - giacomini.com