
Sprinkler HI-FOG® 2000 Type C20-xxC/3

Stock codes C-0001936, C-0001937 and C61511/3

TECHNICAL DATA SHEET K0006970 **REVISION** - **DATE** 25 Jan 2012

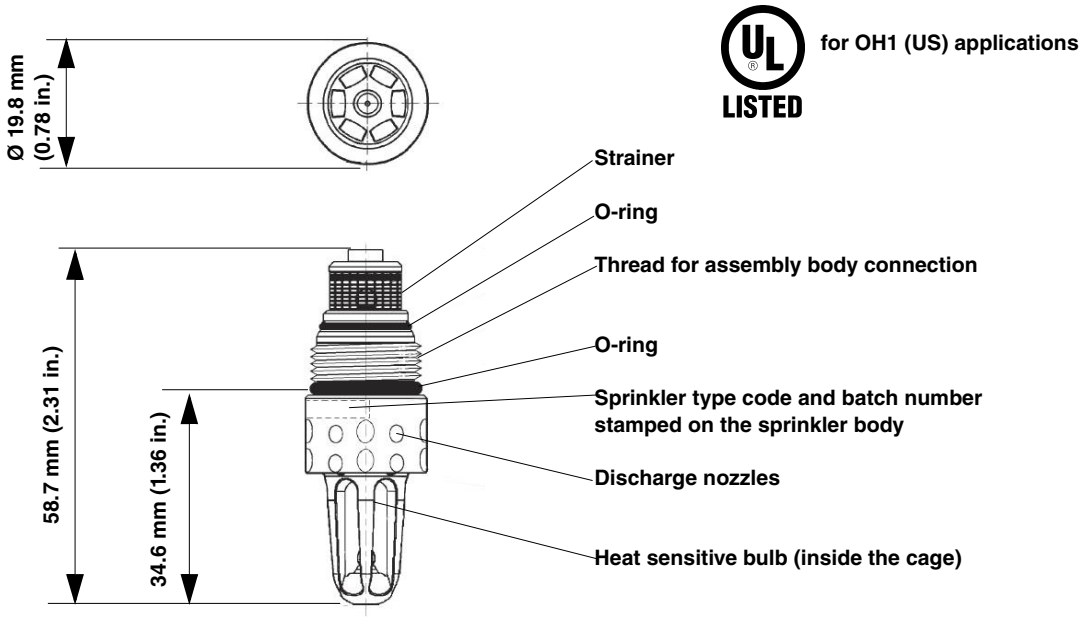

for OH1 (US) applications

Products	Stock code	Type	Heat sensitive bulb
	C-0001936	C20-57C/3	57°C (135°F) (orange color)
	C61511/3	C20-68C/3	68°C (155°F) (red color)
	C-0001937	C20-79C/3	79°C (175°F) (yellow color)*

*) Temperature rating 79°C (175°F) is permitted only near sources of elevated temperature, i.e. space heaters.

General	Body material	Brass	
	Finish	Nickel	
	Mass	0.058 kg	2.05 oz
	K-factor	4.1 lpm/bar$^{0.5}$	0.28 gpm/psi$^{0.5}$
Installation For complete installation instructions in OH1 occupancies, see latest revision of document MO/ES/31/DIOM/FM&UL/10	Location	Ceiling	
	Projection	Pendent	
	Max. ceiling height	4 m	13.1 ft.
	Max. / Min. spacing	3.05 m / 1.83 m	10 ft. / 6 ft.
	Max. distance from walls	1.53 m	5 ft.
	Operating pressure range	80-130 bar	1160-1885 psi
	Min. distance from the top of any stored material to the tip of the sprinkler	533 mm	21 in.

Marioff Corporation Oy • Virnatie 3, 01300 Vantaa, Finland • Tel. +358 010 6880 000 • Fax +358 10 6880 010 • www.marioff.com

© Marioff Corporation 2012. Marioff reserves the right to revise and improve its products and recommended system configurations as it deems necessary without notification. The information contained herein is intended to describe the state of HI-FOG® products and system configurations at the time of its publication and may not reflect the product and/or system configurations at all times in the future.