
Installation Instructions

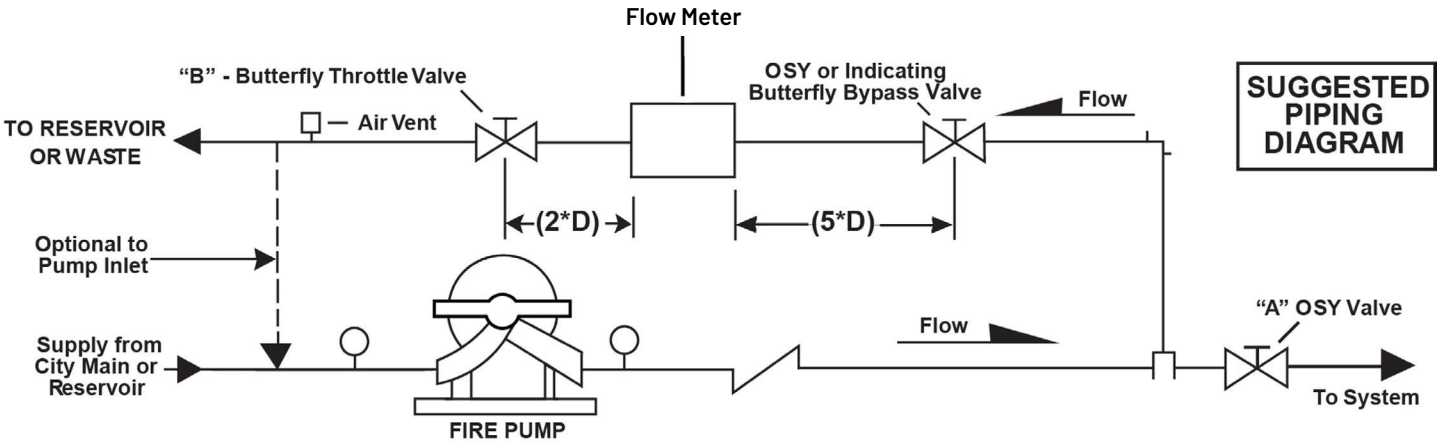

Dimensions and Weights

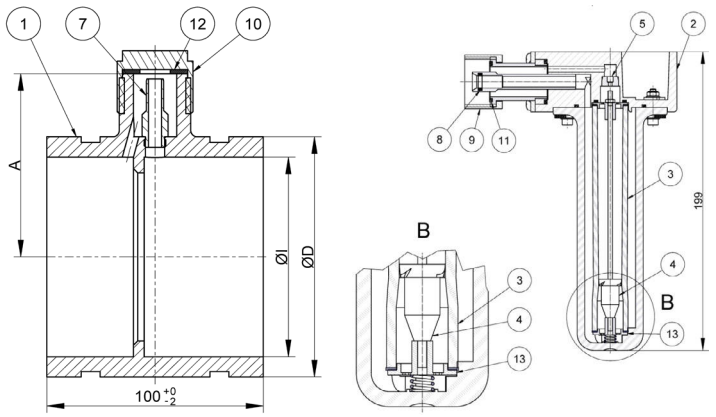


Fig. 1 GT-FluxFP orifice plate and bypass meter, Drawing and dimensions 2"/DN 50 - 4"/DN 100

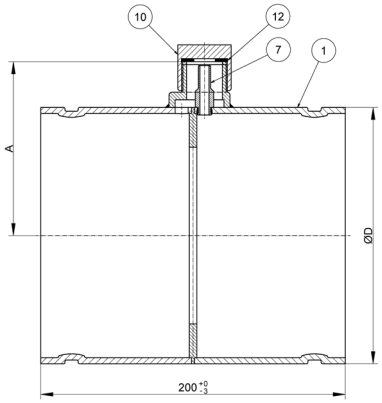


Fig. 2 GT-FluxFP orifice plate, Drawing and dimensions 6"/DN 150 - 12"/DN 300

① Housing tube
② Bypass meter
③ Measuring tube
④ Float
⑤ Bypass orifice
⑦ Differential pressure
⑧ O-Ring
⑨ Screw cap
⑩ Cap
⑪ O-Ring
⑫ Seal
⑬ Filter

Normal Size	Dimensions Inch (mm)		Packaging Size Inch (mm)	Weight (Average) incl. packing lbs (kg)
	Length	Diameter (Outside)		
2"/DN 50	3 15/16" (100)	2 3/8" (60.3)	15 (380) x 11 (270) x 10 (250)	4.5 (2.0)
2 1/2"/DN 65	3 15/16" (100)	2 7/8" (73.0)	15 (380) x 11 (270) x 10 (250)	5 (2.1)
3"/DN 80	3 15/16" (100)	3 1/2" (88.9)	15 (380) x 11 (270) x 10 (250)	5.07 (2.3)
4"/DN 100	3 15/16" (100)	4 1/2" (114.3)	15 (380) x 11 (270) x 10 (250)	7.06 (3.2)
6"/DN 150	7 7/8" (200)	6 1/2" (168.3)	15 (380) x 11 (270) x 10 (250)	11 (5.0)
8"/DN 200	7 7/8" (200)	8 5/8" (2191.1)	15 (380) x 11 (270) x 10 (250)	14.11 (6.4)
10"/DN 250	7 7/8" (200)	10 3/4" (273.0)	20 (500) x 14 (350) x 12 (300)	20.06 (9.1)
12"/DN 300	7 7/8" (200)	12 3/4" (323.9)	20 (500) x 14 (350) x14 (350)	24.03 (11)

This is a Marketing document. Please consult factory for more information.
Manufacturer reserves the right to modify this information without notice