TORNATECH

LISTEN DEVELOP LEAD

Model GPD

Diesel Engine Fire Pump Controllers

Standard Features

- ViZiTouch V2 operator interface
- NEMA 2 assembly
- Pressure and event recorder
- Battery voltage and amperage display
- Run Test push button
- HAND - OFF - AUTO selector switch
- Manual crank pushbuttons (2)
- Stop pushbutton
- Remote start / deluge valve start provision
- Pressure transducer and run test solenoid valve externally mounted
- Gland plate
- Audible alarm
- Alarm contacts for remote indication
- Weekly exercise programmable time clock
- Crank cycle
- Programmable automatic shutdown (minimum run timer)
- Programmable sequential start timer (delay start timer)



NFPA MEMBER 2018-2019

c UL us

FM APPROVED


CE OPTIONAL


SEISMIC COMPLIANT


1. Alarm bell
2. Externally mounted pressure transducer and run test solenoid valve with protective cover
3. Key lock
4. ViZiTouch V2 operator interface
5. Exterior USB Port
   (Interior USB port also supplied)
6. HAND-OFF-AUTO selector switch
7. Remote alarm contacts with removable terminals
8. Gland Plate
9. Automotive type engine connections
10. Battery chargers





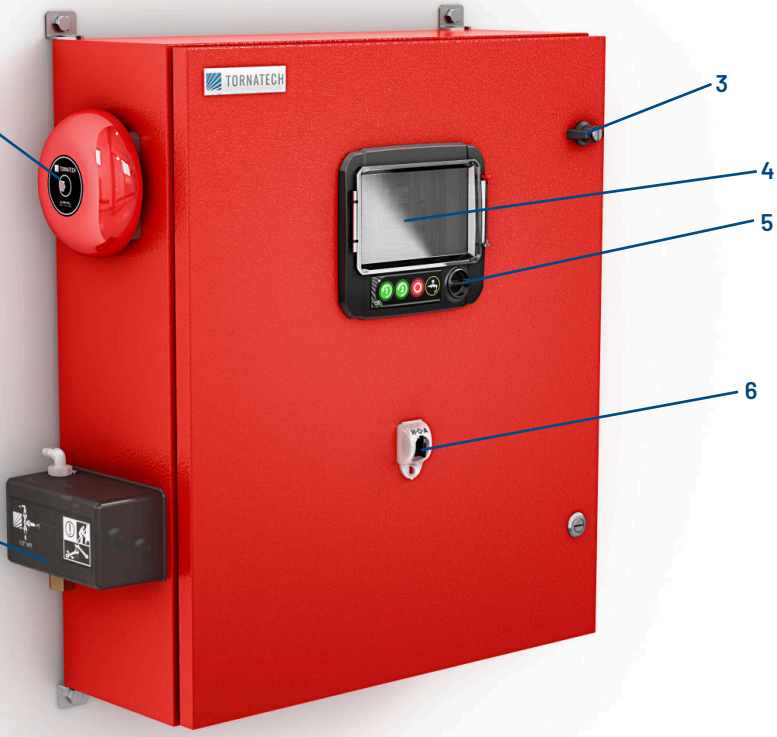



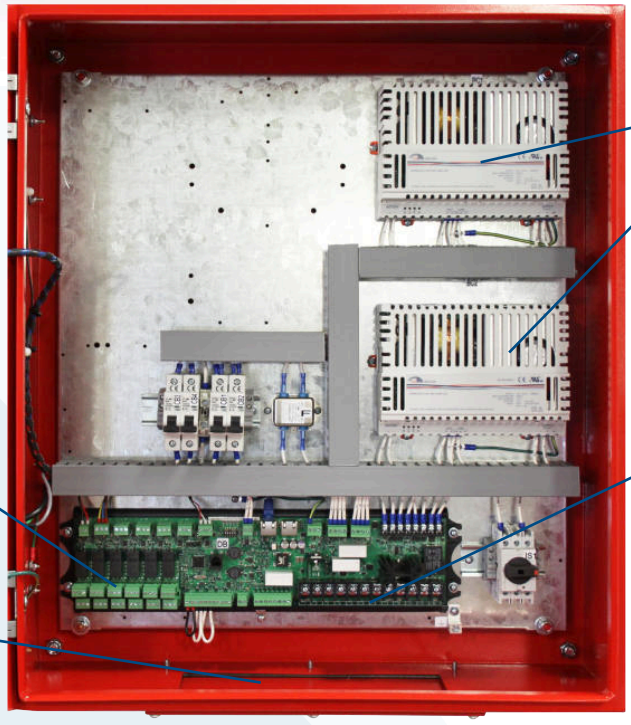




ViZiTouch V2 Operator Interface



HOME SCREEN

Diesel Fire Pump Controller

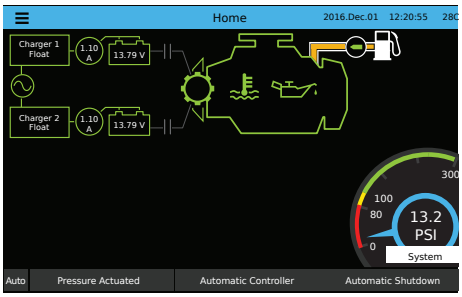


ON-SCREEN MENU



- Home
- Alarm
- Configuration
- History
- Service
- Manual
- Languages


SETTINGS

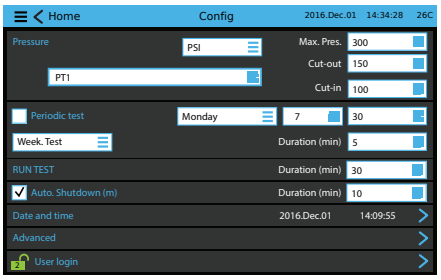


EVENTS



HISTORY/STATISTICS

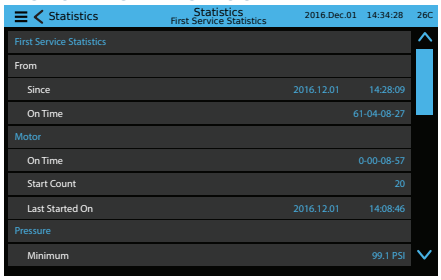


SERVICE

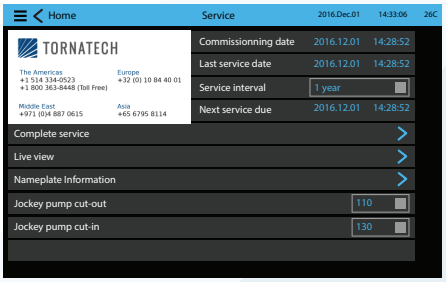


VIZITOUCH V2 MAJOR FEATURES INCLUDE:

- Touch screen operation with 7" color display and intuitive graphics
- Multi-language
- Upgradable software
- Password protected

PUMP CURVES

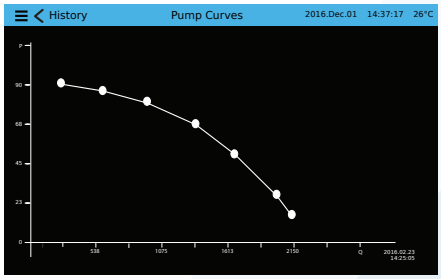

PRESSURE CURVES

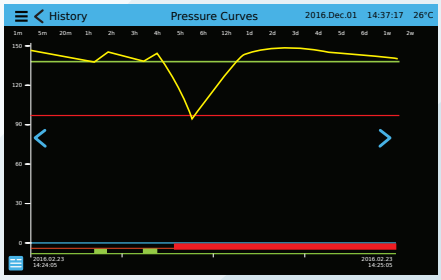

MODEL GPD / WEIGHT & DIMENSIONS

Shipping Weight & Dimensions				
Starting Voltage	WALL MOUNT		FLOOR MOUNT	
	Approx. Dimensions in inches (mm)	Approx. Weight in Lbs (kg)	Approx. Dimensions in inches (mm)	Approx. Weight in Lbs (kg)
12 V.DC	27⅝" h x 27⅛" w x 9" d (700 x 600 x 228)	70 (32)	47⅞" h x 27⅛" w x 9"d (1208 x 600 x 228)	95 (43)
24 V.DC				

HOW TO ORDER: GPD / 12 OR 24 VDC / 120VAC OR 208 to 240VAC / Options

Ex.: GPD / 12 / 220 / B1, C7

AMERICAS
Tornatech Inc.
Head Office
Laval, Quebec, Canada
Tel: + 1 514 334 0523
Toll free: + 1 800 363 8448

EUROPE
Tornatech Europe SPRL
Wavre, Belgium
Tel: + 32 (0) 10 84 40 01

MIDDLE EAST
Tornatech FZE
Dubai, United Arab Emirates
Tel: + 971 (0)4 887 0615

ASIA
Tornatech Pte Ltd.
Singapore
Tel: + 65 6795 8114
Tel: + 65 6795 7823