

PRODUCT LINE AND CAPABILITIES

STATE OF THE ART TECHNOLOGY

WORLDWIDE PRODUCT LINE – ALL TYPES AND SIZES

WEFLO



THE STATE OF THE ART

AUTOMATED FOUNDRY

- **Electric Induction Furnaces**
- **Automated Pouring Lines**
- **Automated Molding Lines**
- **Environmentally Friendly**
- **400% Increase in Capacity**





MACHINING CENTERS

- CNC Machining Centers for New Foundry Patterns

NEW RUBBER MOLDING & PRODUCTION LINE

- EPDM ENCAPSULATED DISCS
- RUBBER LINING FOR BUTTERFLY VALVES
- RUBBER DISC SEALING – CHECK VALVES
- SPECIALTY COMPOUNDS AVAILABLE



FUSION BONDED EPOXY COATING SYSTEMS





FBE CAPABILITIES

- **RAL 3000 SAFETY RED – NSF 61 CERTIFIED**
- **RAL 5015 BLUE – NSF 61 CERTIFIED**
- **SPECIAL FUSION BONDED EPOXY COATING AND POLYESTER TOP COAT FOR SEA WATER**
- **CERTIFIED TO ISO 12944-6-17 FOR C5-H HAZARDOUS MARINE ENVIRONMENT**



TEST LABORATORY

- CERTIFIED TO ISO 17025 STANDARD

- UNDERWRITERS LABORTORIES CERTIFIED AS WITNESS TEST DATA PROGRAM



UNDERWRITERS LABORATORIES TEST LAB



CERTIFICATE OF PARTICIPATION

Issued by
UL LLC

WEFLO VALVE CO., LTD.

Intersection of Huadong Road and Chunyang Road,
Qingdao National High-tech Industrial Development Zone, Qingdao, Shandong 266111,China

to congratulate the company for having been assessed
and found eligible to participate in the

-Witness Test Data Program-

For

UL 193 - Alarm Valves for Fire-Protection Service
UL 246 - Hydrants for Fire-Protection Service
UL 260 - Dry Pipe and Deluge Valves for Fire-Protection Service
UL 1739 - Pilot-Operated Pressure-Control Valves for Fire-Protection Service

Subscriber Number: 100127053
Issued: November 01, 2016
Expired: November 01, 2018

Yee Fong
Business Development Director
Building, Fire & Life Safety Technologies



CERTIFICATE OF PARTICIPATION

Issued by
UL LLC

WEFLO VALVE CO., LTD.

Intersection of Huadong Road and Chunyang Road,
Qingdao National High-tech Industrial Development Zone, Qingdao, Shandong 266111,China

to congratulate the company for having been assessed
and found eligible to participate in the

-Witness Test Data Program-

For

UL 213 - Rubber Gasketed Fittings for Fire-Protection Service
UL 262 - Gate Valves for Fire-Protection Service
UL 312 - Check Valves for Fire-Protection Service
UL 1091 - Butterfly Valves for Fire-Protection Service

Subscriber Number: 100127053
Issued: November 01, 2016
Expired: November 01, 2018

Yee Fong
Business Development Director
Building, Fire & Life Safety Technologies

ISO 9001:2015 ACCREDITED

- MATERIAL TEST REPORTS

WEFLO®

WEFLO VALVE CO., LTD.
INSPECTION CERTIFICATE

EN 10204 3.1

MATERIAL TEST CERTIFICATE

Customer:	\	Order No.:	\	Date:	\
Invoice No.:	\	Test No.:	\	Page:	1/1

Item No.	Q'ty (PCS)	Description	Class	Size	Material		Hydrostatic Test According to UL246		Result
					Standpipe Upper/ Standpipe Lower/Elbow	Bonnet	Body	Seat	
1	1	F0733-250 FM/UL:DI Standpipe Upper & Standpipe Lower Fire Hydrant	250PSI	3'-6"	ASTM A536 65-45-12	ASTM A126-B	34.5bar	34.5bar	OK

Item No.	Order No.:	Part Name	Heat No.	Chemical Composition (%)										Mechanical Properties			
				C	Si	Mn	P	S	Cr	Ni	Mo	Cu	V.	Tensile Strength (Mpa)	Yield Point (Mpa)	Elongation%	HB
1	\	Standpipe Upper	20180422	3.68	2.65	0.16	0.039	0.008	N/A	N/A	N/A	N/A	N/A	500	400	14.0	N/A
		Standpipe Lower	M20180106	3.72	2.74	0.21	0.019	0.017	N/A	N/A	N/A	N/A	N/A	550	440	15.0	N/A
		Elbow	T20170501	3.72	2.67	0.21	0.038	0.009	N/A	N/A	N/A	N/A	N/A	511	465	14.0	N/A
		Bonnet	20170708	3.09	1.67	0.908	0.057	0.041	N/A	N/A	N/A	N/A	N/A	270	N/A	N/A	N/A

We hereby certify that items mentioned above have been tested and inspected in our presence and are found to be in accordance with the drawings, specification and satisfy the requirements. The guarantee period shall be 12 months from the date of the delivery, for any manufacturing defects.

Validated by quality manager Wang Zhaojian

DNV·GL

MANAGEMENT SYSTEM CERTIFICATE

Certificate No: 1132-2004-AQ-RGC-RvA | Initial certification date: 23 December, 2003 | Valid: 23 December, 2018 - 23 December, 2021

This is to certify that the management system of

Weflo Valve Co., Ltd.

Intersection of Huadong Road, and Chunyang Road, Qingdao National High-tech Industrial Development Zone, China, 266111
and the sites as mentioned in the appendix accompanying this certificate

has been found to conform to the Quality Management System standard:
ISO 9001:2015/GB/T 19001-2016

This certificate is valid for the following scope:

Design, Casting, Processing and Manufacture of Fluid Flow Valves and Pipe Fittings

Place and date:
Shanghai, 13 December, 2018

IAF MLA MGMT. SYS. RvA C 025
The RvA is a signatory to the IAF MLA

For the issuing office:
DNV GL – Business Assurance
Suite A, Building 9, No.1591 Hongqiao Road, Changning District, Shanghai 200336, P.R. China
TEL: +86 21 32799000

Zhu Hai Ming
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.
ACCREDITED UNIT: DNV GL Business Assurance B.V., ZWOLSEWEG 1, 2994 LB, BARENDRECHT, NETHERLANDS. TEL: +31102922689. assurance.dnvgl.com

CRATING AND PACKAGING

Improved Packaging for Indicator Posts



Packaging for Fire Hydrants



SPECIAL PACKAGING AVAILABLE

Sea Water Protection



OS&Y With Supervisory Switch



UL / FM PRODUCTS









UL / FM / AWWA FIRE HYDRANTS

UL / FM / AWWA DRY BARREL FIRE HYDANTS

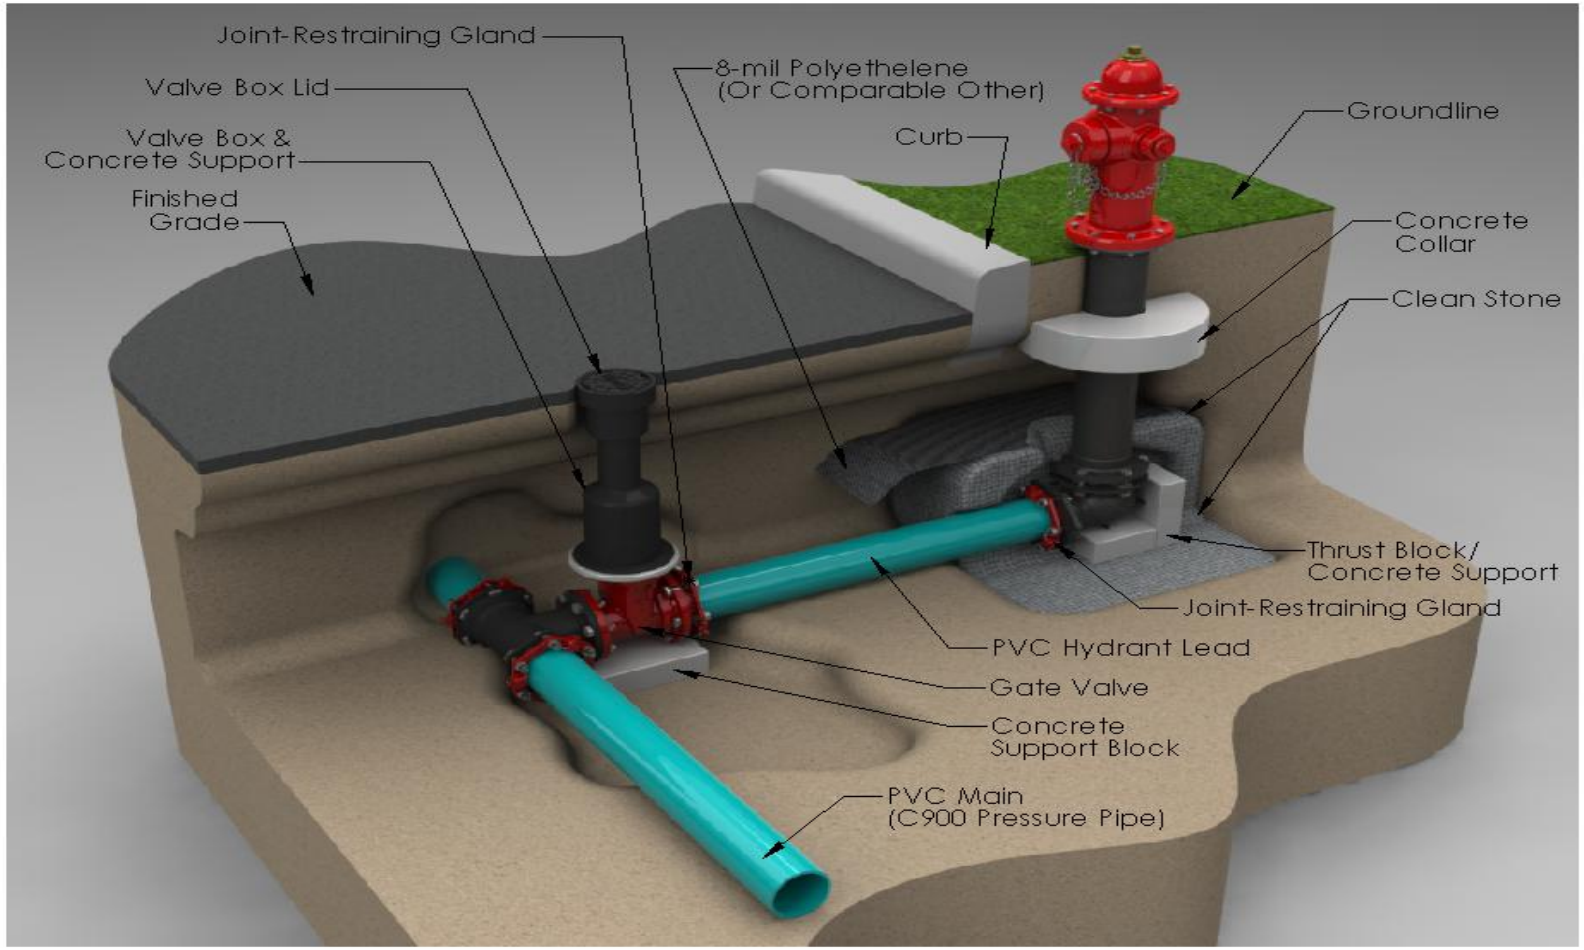

F0733-250

- AVAILABLE WITH FLANGED OR MECHANICAL JOINT CONNECTION
- ALL BURY DEPTHS AVAILABLE
- UL LISTED / FM APPROVED
- MANUFACTURED TO AWWA C502 STANDARD
- FUSION BONDED EPOXY COATED BASE, POLYURETHANE ENAMEL COATED UPPER BARREL

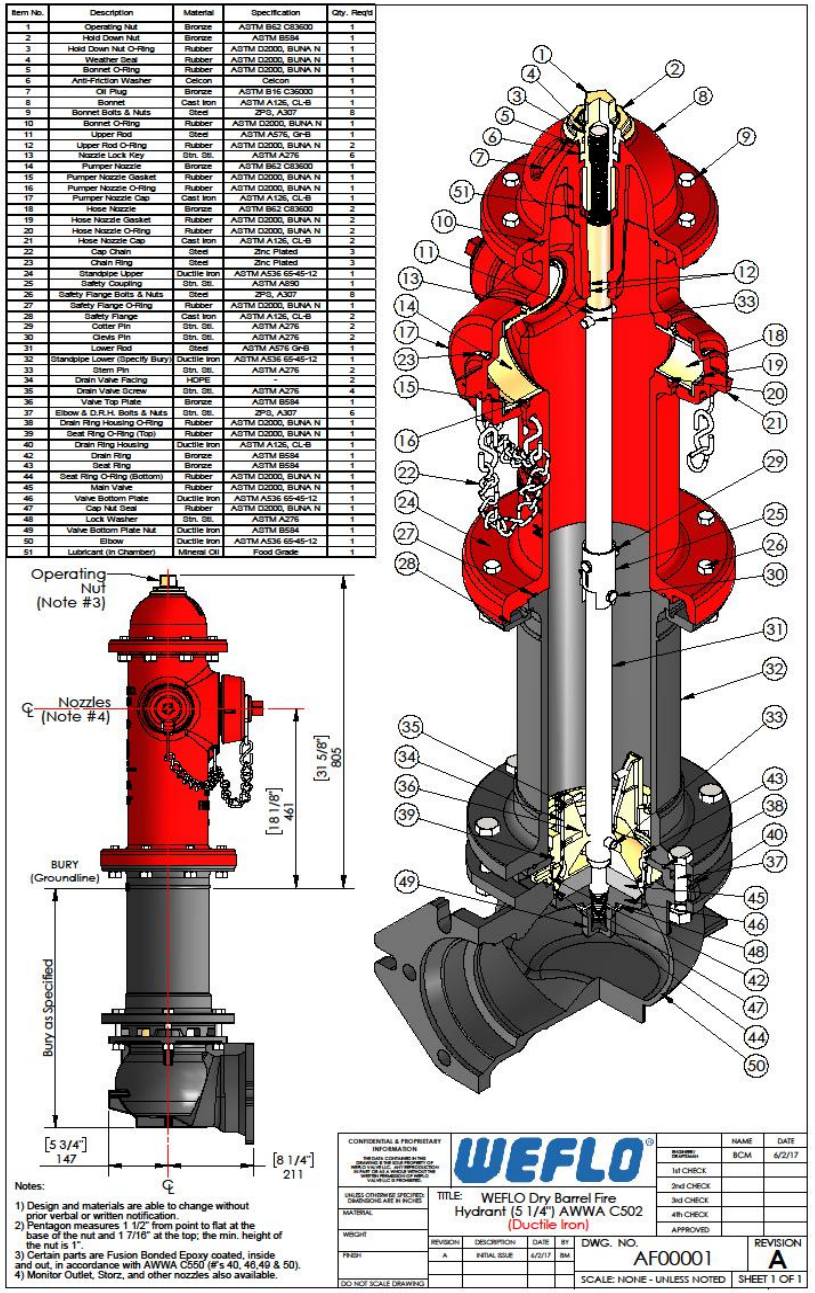

Item No.	Description	Material	Specification	Qty. Req'd
1	Operating Nut	Bronze	ASTM B62 C83600	1
2	Hold Down Nut	Bronze	ASTM B584	1
3	Hold Down Nut O-Ring	Rubber	ASTM D2000, BUNA N	1
4	Weather Seal	Rubber	ASTM D2000, BUNA N	1
5	Bonnet O-Ring	Rubber	ASTM D2000, BUNA N	1
6	Anti-Friction Washer	Celcon	Celcon	1
7	Oil Plug	Bronze	ASTM B16 C36000	1
8	Bonnet	Cast Iron	ASTM A126, CL-B	1
9	Bonnet Bolts & Nuts	Steel	ZPS, A307	8
10	Bonnet O-Ring	Rubber	ASTM D2000, BUNA N	1
11	Upper Rod	Steel	ASTM A576, Gr-B	1
12	Upper Rod O-Ring	Rubber	ASTM D2000, BUNA N	2
13	Nozzle Lock Key	Stn. Stl.	ASTM A276	6
14	Pumper Nozzle	Bronze	ASTM B62 C83600	1
15	Pumper Nozzle Gasket	Rubber	ASTM D2000, BUNA N	1
16	Pumper Nozzle O-Ring	Rubber	ASTM D2000, BUNA N	1
17	Pumper Nozzle Cap	Cast Iron	ASTM A126, CL-B	1
18	Hose Nozzle	Bronze	ASTM B62 C83600	2
19	Hose Nozzle Gasket	Rubber	ASTM D2000, BUNA N	2
20	Hose Nozzle O-Ring	Rubber	ASTM D2000, BUNA N	2
21	Hose Nozzle Cap	Cast Iron	ASTM A126, CL-B	2
22	Cap Chain	Steel	Zinc Plated	3
23	Chain Ring	Steel	Zinc Plated	3
24	Standpipe Upper	Ductile Iron	ASTM A536 65-45-12	1
25	Safety Coupling	Stn. Stl.	ASTM A890	1
26	Safety Flange Bolts & Nuts	Steel	ZPS, A307	8
27	Safety Flange O-Ring	Rubber	ASTM D2000, BUNA N	1
28	Safety Flange	Cast Iron	ASTM A126, CL-B	2
29	Cotter Pin	Stn. Stl.	ASTM A276	2
30	Clevis Pin	Stn. Stl.	ASTM A276	2
31	Lower Rod	Steel	ASTM A576 Gr-B	1
32	Standpipe Lower (Specify Bury)	Ductile Iron	ASTM A536 65-45-12	1
33	Stem Pin	Stn. Stl.	ASTM A276	2
34	Drain Valve Facing	HDPE	-	2
35	Drain Valve Screw	Stn. Stl.	ASTM A276	4
36	Valve Top Plate	Bronze	ASTM B584	1
37	Elbow & D.R.H. Bolts & Nuts	Stn. Stl.	ZPS, A307	6
38	Drain Ring Housing O-Ring	Rubber	ASTM D2000, BUNA N	1
39	Seat Ring O-Ring (Top)	Rubber	ASTM D2000, BUNA N	1
40	Drain Ring Housing	Ductile Iron	ASTM A126, CL-B	1
42	Drain Ring	Bronze	ASTM B584	1
43	Seat Ring	Bronze	ASTM B584	1
44	Seat Ring O-Ring (Bottom)	Rubber	ASTM D2000, BUNA N	1
45	Main Valve	Rubber	ASTM D2000, BUNA N	1
46	Valve Bottom Plate	Ductile Iron	ASTM A536 65-45-12	1
47	Cap Nut Seal	Rubber	ASTM D2000, BUNA N	1
48	Lock Washer	Stn. Stl.	ASTM A276	1
49	Valve Bottom Plate Nut	Ductile Iron	ASTM B584	1
50	Elbow	Ductile Iron	ASTM A536 65-45-12	1
51	Lubricant (In Chamber)	Mineral Oil	Food Grade	1


c UL us LISTED

FM APPROVED

American Water Works Association

F0733-250-M

- **FF OR RF FLANGE AVAILABLE**
- **UL / FM WITH MONITOR ELBOW**
- **AVAILABLE WITH STORZ NOZZLE**
- **MANY DIFFERENT NOZZLE CONFIGURATIONS UL / FM**

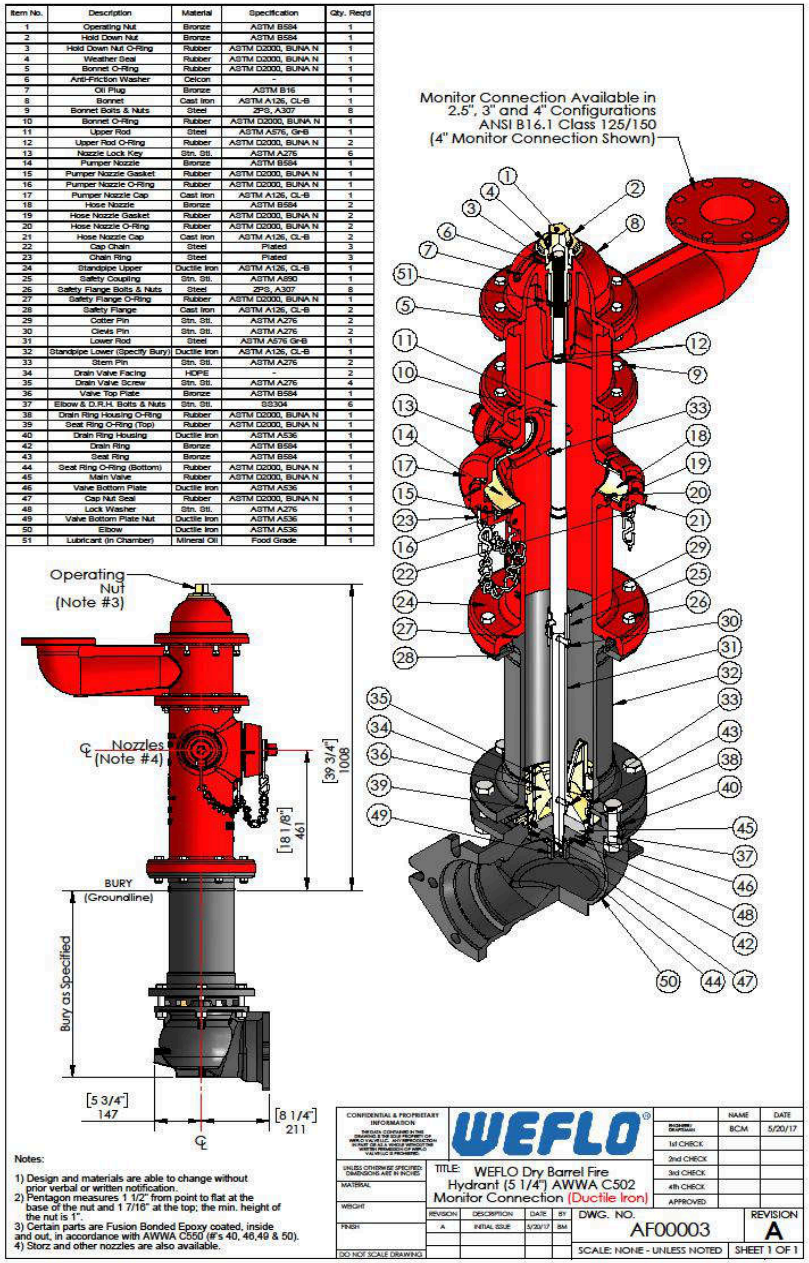

Item No.	Description	Material	Specification	Qty. Req'd
1	Operating Nut	Bronze	ASTM B584	1
2	Hold Down Nut	Bronze	ASTM B584	1
3	Hold Down Nut O-Ring	Rubber	ASTM D2000, BUNA N	1
4	Weather Seal	Rubber	ASTM D2000, BUNA N	1
5	Bonnet O-Ring	Rubber	ASTM D2000, BUNA N	1
6	Anti-Friction Washer	Delcon	-	1
7	Oil Plug	Bronze	ASTM B16	1
8	Bonnet	Cast Iron	ASTM A126, CL-B	1
9	Bonnet Bolts & Nuts	Steel	ZPS, A307	8
10	Bonnet O-Ring	Rubber	ASTM D2000, BUNA N	1
11	Upper Rod	Steel	ASTM A576, GrB	1
12	Upper Rod O-Ring	Rubber	ASTM D2000, BUNA N	2
13	Nozzle Lock Key	Stn. Stl.	ASTM A276	6
14	Pumper Nozzle	Bronze	ASTM B584	1
15	Pumper Nozzle Gasket	Rubber	ASTM D2000, BUNA N	1
16	Pumper Nozzle O-Ring	Rubber	ASTM D2000, BUNA N	1
17	Pumper Nozzle Cap	Cast Iron	ASTM A126, CL-B	1
18	Hose Nozzle	Bronze	ASTM B584	2
19	Hose Nozzle Gasket	Rubber	ASTM D2000, BUNA N	2
20	Hose Nozzle O-Ring	Rubber	ASTM D2000, BUNA N	2
21	Hose Nozzle Cap	Cast Iron	ASTM A126, CL-B	2
22	Cap Chain	Steel	Plated	3
23	Chain Ring	Steel	Plated	3
24	Standpipe Upper	Ductile Iron	ASTM A126, CL-B	1
25	Safety Coupling	Stn. Stl.	ASTM A990	1
26	Safety Flange Bolts & Nuts	Steel	ZPS, A307	8
27	Safety Flange O-Ring	Rubber	ASTM D2000, BUNA N	1
28	Safety Flange	Cast Iron	ASTM A126, CL-B	2
29	Cotter Pin	Stn. Stl.	ASTM A276	2
30	Clevis Pin	Stn. Stl.	ASTM A276	2
31	Lower Rod	Steel	ASTM A576 GrB	1
32	Standpipe Lower (Specify Bury)	Ductile Iron	ASTM A126, CL-B	1
33	Stem Pin	Stn. Stl.	ASTM A276	2
34	Drain Valve Facing	HDPE	-	2
35	Drain Valve Screw	Stn. Stl.	ASTM A276	4
36	Valve Top Plate	Bronze	ASTM B584	1
37	Elbow & D.R.H. Bolts & Nuts	Stn. Stl.	SS304	6
38	Drain Ring Housing O-Ring	Rubber	ASTM D2000, BUNA N	1
39	Seat Ring O-Ring (Top)	Rubber	ASTM D2000, BUNA N	1
40	Drain Ring Housing	Ductile Iron	ASTM A536	1
42	Drain Ring	Bronze	ASTM B584	1
43	Seat Ring	Bronze	ASTM B584	1
44	Seat Ring O-Ring (Bottom)	Rubber	ASTM D2000, BUNA N	1
45	Main Valve	Rubber	ASTM D2000, BUNA N	1
46	Valve Bottom Plate	Ductile Iron	ASTM A536	1
47	Cap Nut Seal	Rubber	ASTM D2000, BUNA N	1
48	Lock Washer	Stn. Stl.	ASTM A276	1
49	Valve Bottom Plate Nut	Ductile Iron	ASTM A536	1
50	Elbow	Ductile Iron	ASTM A536	1
51	Lubricant (In Chamber)	Mineral Oil	Food Grade	1

c UL us LISTED

FM APPROVED

American Water Works Association

F0733-250 UL / FM / AWWA FIRE HYDRANTS





UL / FM / AWWA
WET BARREL FIRE HYDRANTS

- Various Nozzle Configurations
- Monitor Style Available
- Safety Red or Yellow
- Fusion Bonded Epoxy Coated Int. & Ext.



UL / FM / AWWA FIRE HYDRANTS

- AVAILABLE WITH INTEGRAL STORZ NOZZLES



WORK IN PROCESS





UL / FM GATE VALVES

- 2” – 24” SIZES
- OS&Y
- PIV
- NRS
- FLANGED
- GROOVED
- MECHANICAL JOINT



OS&Y GATE VALVES

2”-24” UL / FM


NSF-61 CERTIFIED

HEAVY DUTY CONSTRUCTION

ALL END TYPES AVAILABLE



F0111 / F1111

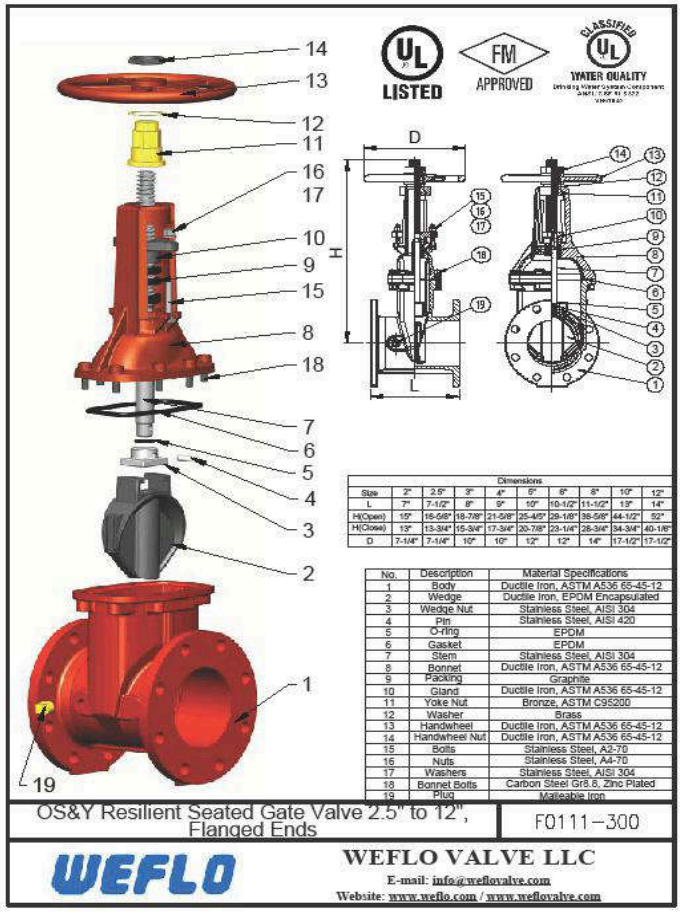

Dimensions									
Size	2"	2.5"	3"	4"	5"	6"	8"	10"	12"
L	7"	7-1/2"	8"	9"	10"	10-1/2"	11-1/2"	13"	14"
H(Open)	15"	16-5/8"	18-7/8"	21-5/8"	25-4/5"	29-1/8"	36-5/8"	44-1/2"	52"
H(Close)	13"	13-3/4"	15-3/4"	17-3/4"	20-7/8"	23-1/4"	28-3/4"	34-3/4"	40-1/8"
D	7-1/4"	7-1/4"	10"	10"	12"	12"	14"	17-1/2"	17-1/2"

No.	Description	Material Specifications
1	Body	Ductile Iron, ASTM A536 65-45-12
2	Wedge	Ductile Iron, EPDM Encapsulated
3	Wedge Nut	Stainless Steel, AISI 304
4	Pin	Stainless Steel, AISI 420
5	O-ring	EPDM
6	Gasket	EPDM
7	Stem	Stainless Steel, AISI 304
8	Bonnet	Ductile Iron, ASTM A536 65-45-12
9	Packing	Graphite
10	Gland	Ductile Iron, ASTM A536 65-45-12
11	Yoke Nut	Bronze, ASTM C95200
12	Washer	Brass
13	Handwheel	Ductile Iron, ASTM A536 65-45-12
14	Handwheel Nut	Ductile Iron, ASTM A536 65-45-12
15	Bolts	Stainless Steel, A2-70
16	Nuts	Stainless Steel, A4-70
17	Washers	Stainless Steel, AISI 304
18	Bonnet Bolts	Carbon Steel Gr8.8, Zinc Plated
19	Plug	Malleable Iron

OS&Y Resilient Seated Gate Valve 2.5" to 12", Flanged Ends


F0111-300

WEFLO

WEFLO VALVE LLC

E-mail: info@weflovalve.com

Website: www.weflo.com / www.weflovalve.com

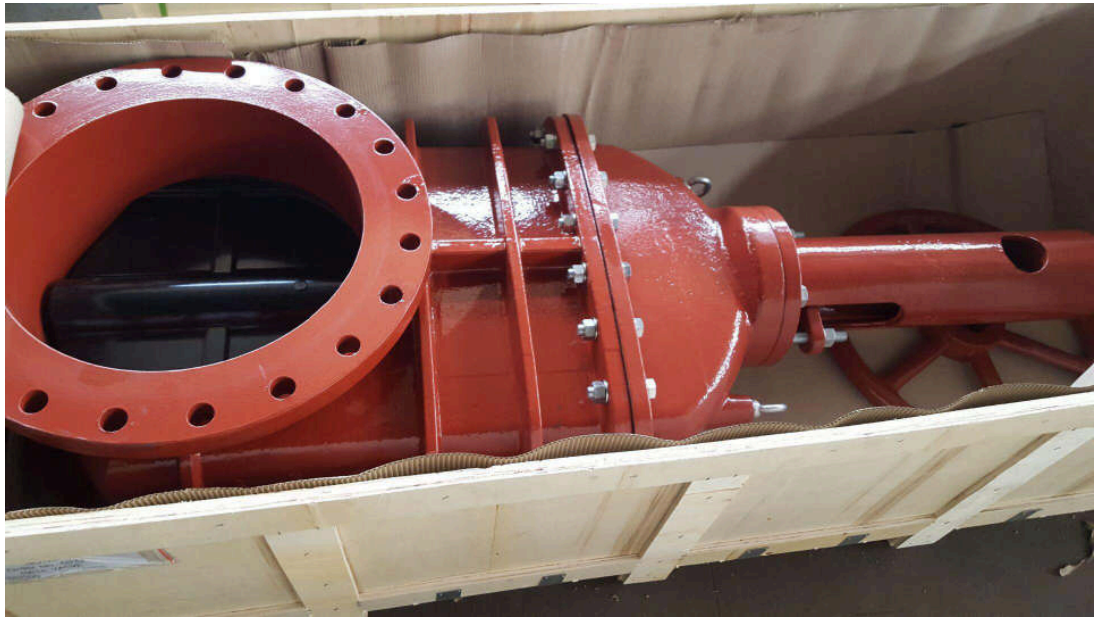


POST INDICATOR VALVES


- 4”-24” UL / FM / AWWA
- REMOVABLE POST PLATE DESIGN AVAILABLE
- ALL END CONFIGURATIONS
- NSF-61 / NSF-372 CERTIFIED



POST INDICATOR VALVE INSTALLATION

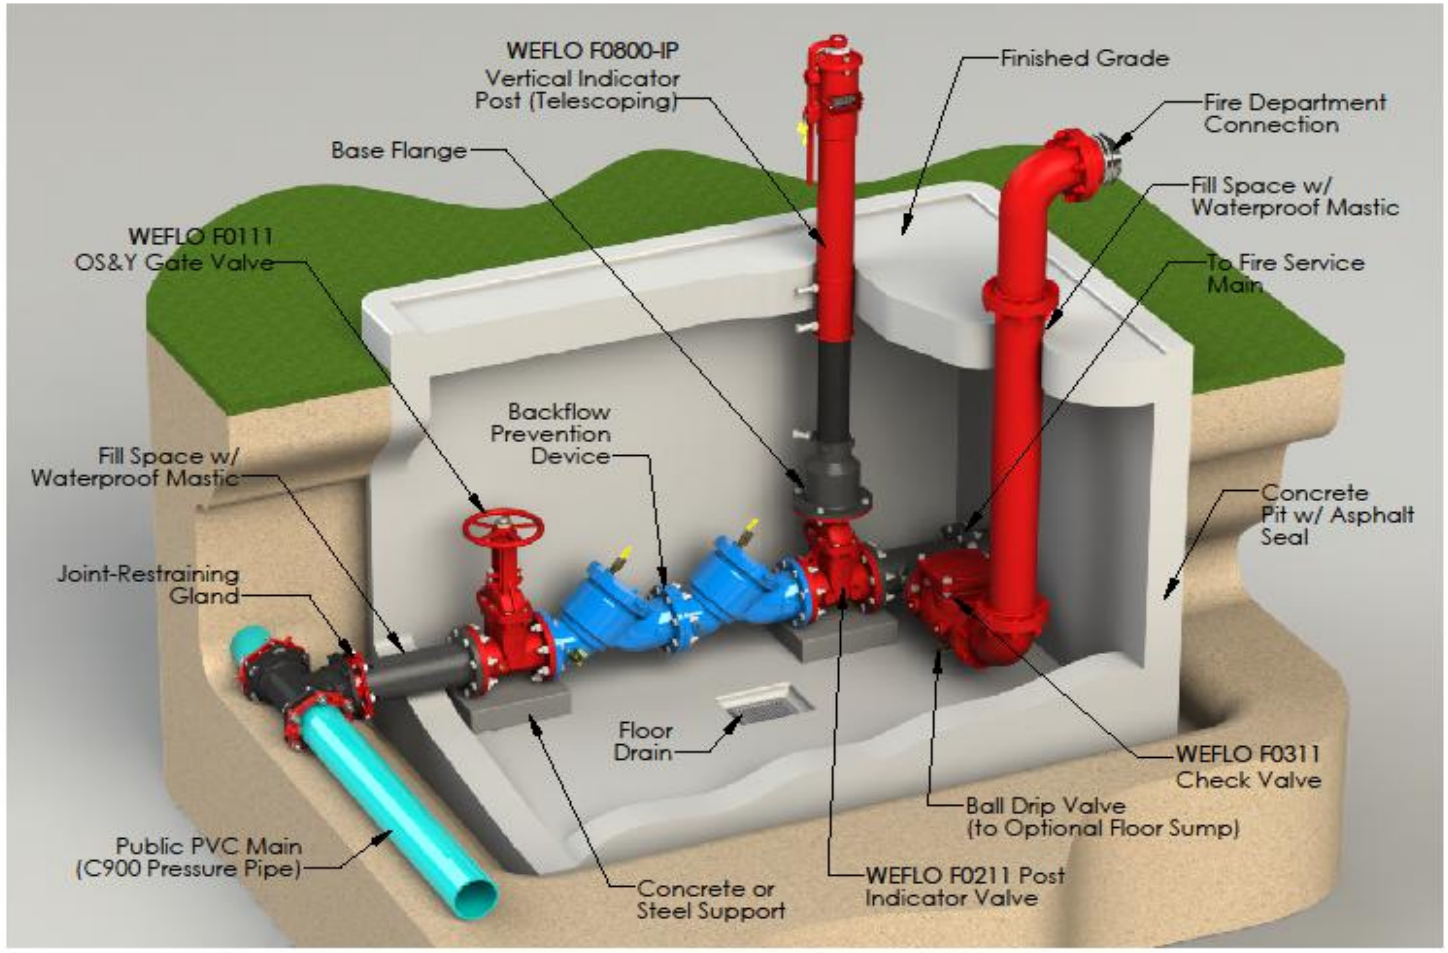

14”-24” POST INDICATOR VALVE

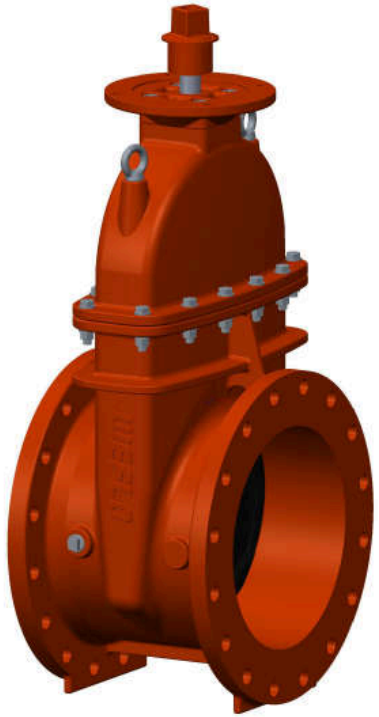


c UL US LISTED

FM APPROVED

WEFLO®

LISTED

LARGE DIAMETER POST INDICATOR VALVE /
VERTICAL POST ASSEMBLY WITH GEAR DRIVE
UL LISTED 14"-16"-18"-20"-24" SIZES

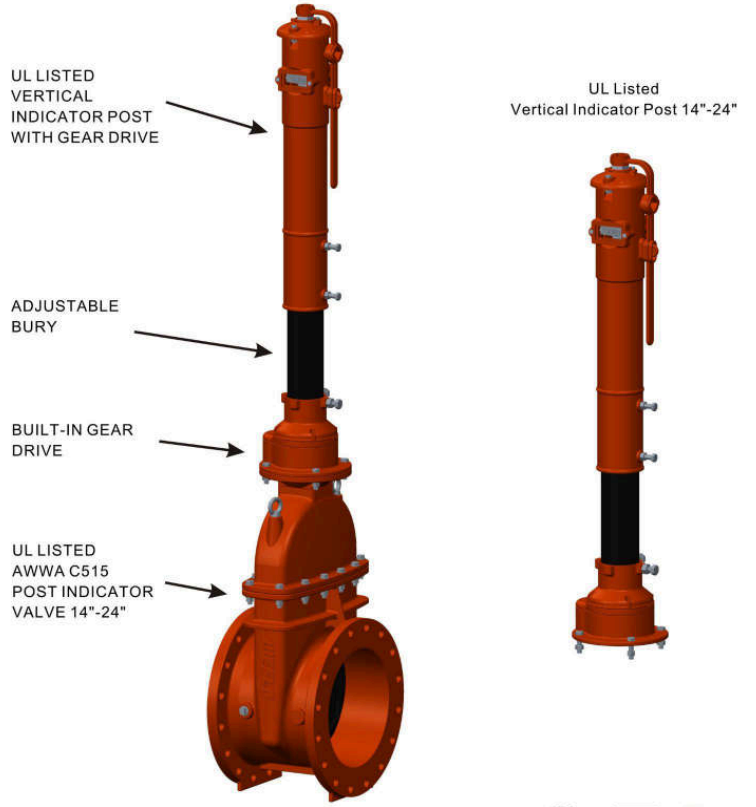

www. weflo. com

LISTED NFPA American Water Works Association

F0600-IP VERTICAL INDICATOR POST

- ADJUSTABLE BURY
- SOLID CAST UPPER BARREL
- HEAVY DUTY CONSTRUCTION
- NOW UL LISTED THROUGH 24” SIZE





F0800-IP ADJUSTABLE POST

- TELESCOPING STEM DESIGN – NO NEED TO CUT STEM
- EASILY INSTALLED
- SHIPS IN ONE CRATE
- EASY TO ASSEMBLE, EASY TO STORE

c UL us LISTED

FM APPROVED




F0800-IP

- **GALVANIZED STEM FOR SUPERIOR COROSSION RESISTANCE**
- **STAINLESS STEEL THREADED TARGET ASSEMBLY**
- **CIRCLE CLIP – EASY TO ADJUST**



F0601-IP GEARED POST

- THE ONLY UL LISTED VERTICAL INDICATOR POST IN THE WORLD WITH A BUILT-IN GEAR DRIVE
- ALL EPC'S SPECIFY GEAR DRIVE FOR LARGE DIAMETER GATE VALVES
- UL / FM DOES NOT LIST OR APPROVE GATE VALVES WITH GEARS
- F601-IP IS UL LISTED 14"-24" POST ON UL / FM 14"-24" VALVE

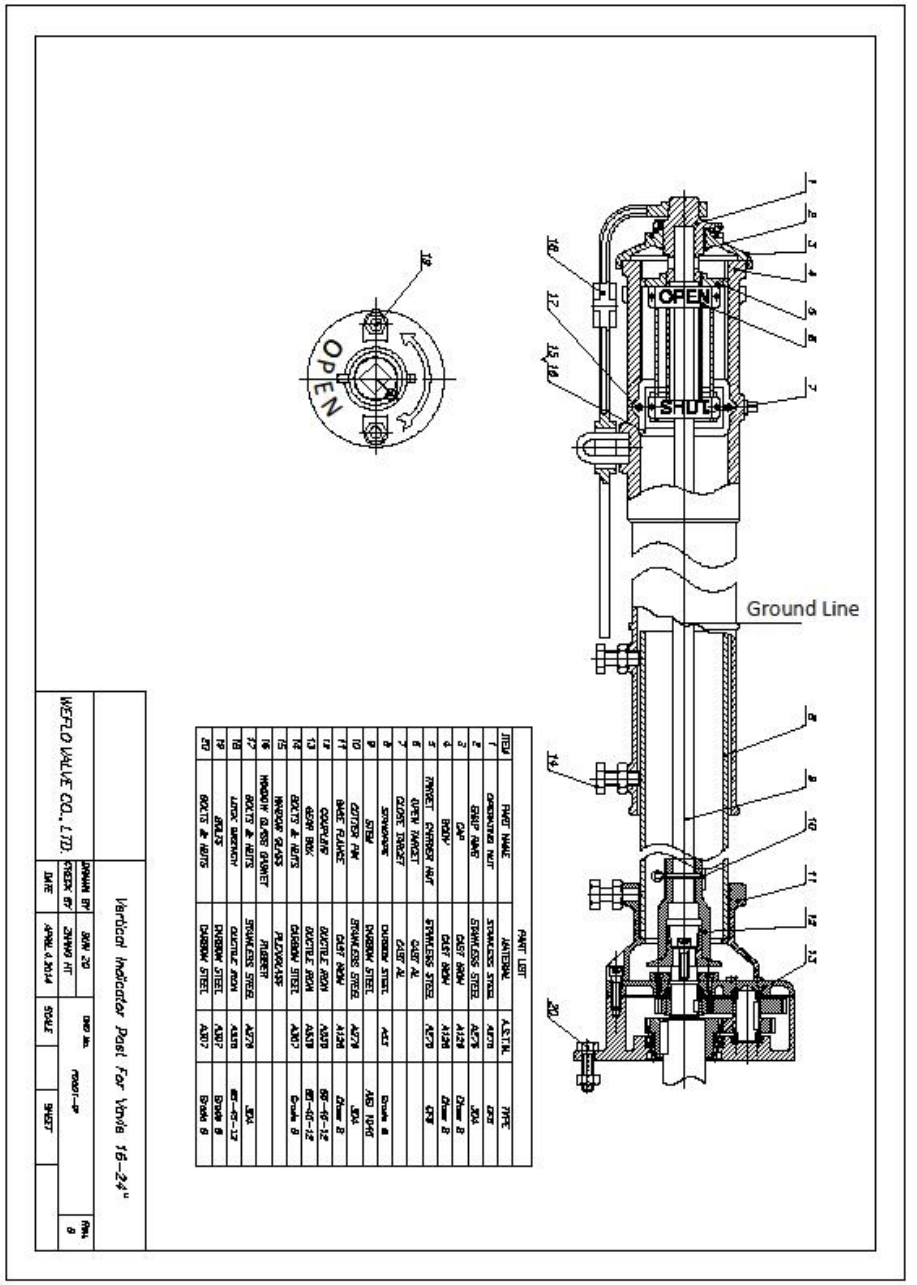


NRS GATE VALVES

- **UL / FM / NSF-61 / NSF-372 Through 24” Sizes**
- **All End Configurations**
- **With Operating Nut or Handwheel**
- **More and more Waterworks Customers Demanding UL / FM**





3D SUBMITTAL SHEETS

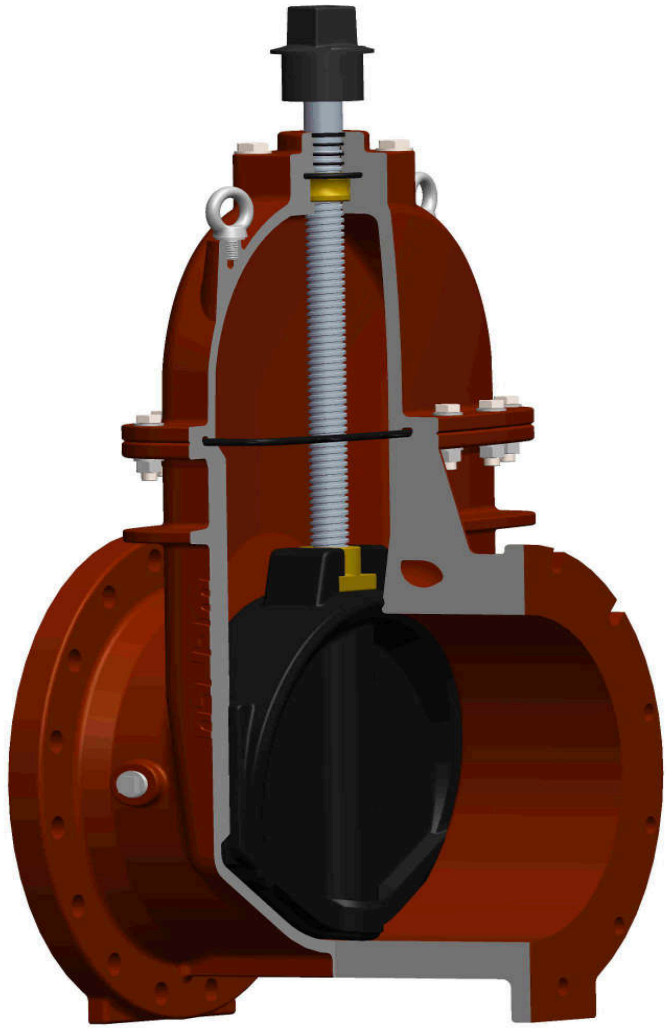


WEFLO


NRS Resilient Seated Gate Valve
FL x FL Ends, 200PSI/250PSI

FIG·F1211-200/250-HW

Schematic

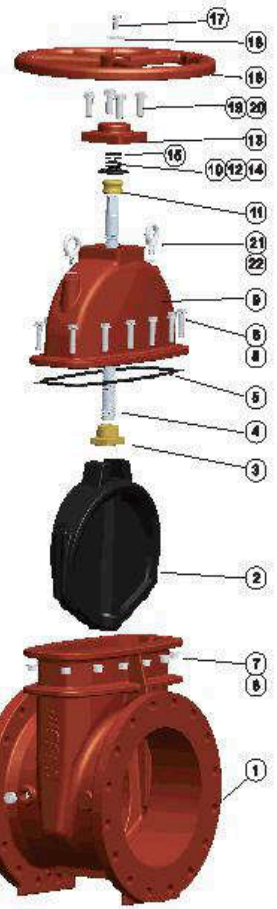

Line Drawing

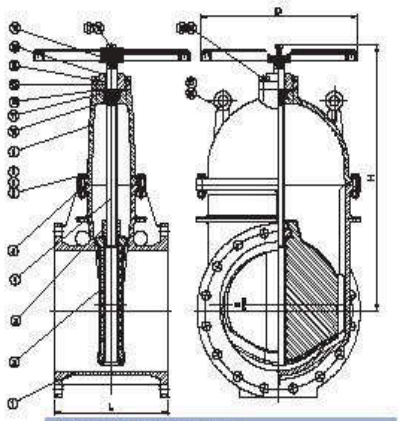

Material Specifications

Size	L	H	D
14"	15"	32.87"	22"
16"	16"	35.83"	22"
18"	17"	41.34"	24"
20"	18"	44.09"	24"
24"	20"	50.79"	30

No.	Description	Material Specifications
1	Body	Ductile Iron, ASTM A536 65-45-12
2	Wedge	Ductile Iron, EPDM Encapsulated
3	Wedge Nut	Bronze, ASTM C86500
4	Stem	Stainless Steel, AISI 304
5	Gasket	EPDM
6	Bolts	Carbon Steel, ASTM A307B
7	Nuts	Carbon Steel, ASTM A307B
8	Washers	Carbon Steel, Zinc Plated
9	Bonnet	Ductile Iron, ASTM A536 65-45-12
10	O-Ring	EPDM
11	Thrust Collar	Bronze, ASTM C86500
12	O-Ring	EPDM
13	Gland	Ductile Iron, ASTM A536 65-45-12
14	O-Ring	EPDM
15	Dustproof Ring	NBR
16	Handwheel	Ductile Iron, ASTM A536 65-45-12
17	Bolt	Carbon Steel, Zinc Plated
18	Washers	Carbon Steel, Zinc Plated
19	Bolts	Carbon Steel, ASTM A307B
20	Washers	Carbon Steel, Zinc Plated
21	Eyebolts	Carbon Steel, ASTM A307B
22	Washers	Carbon Steel, Zinc Plated


The designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.


UL – FM CHECK VALVES

- 2”-12” Flange x Flange
- Ductile-Iron Body, Heavy Duty Construction
- AWWA C508 Standard




GROOVED END & DOUBLE DOOR CHECK VALVES

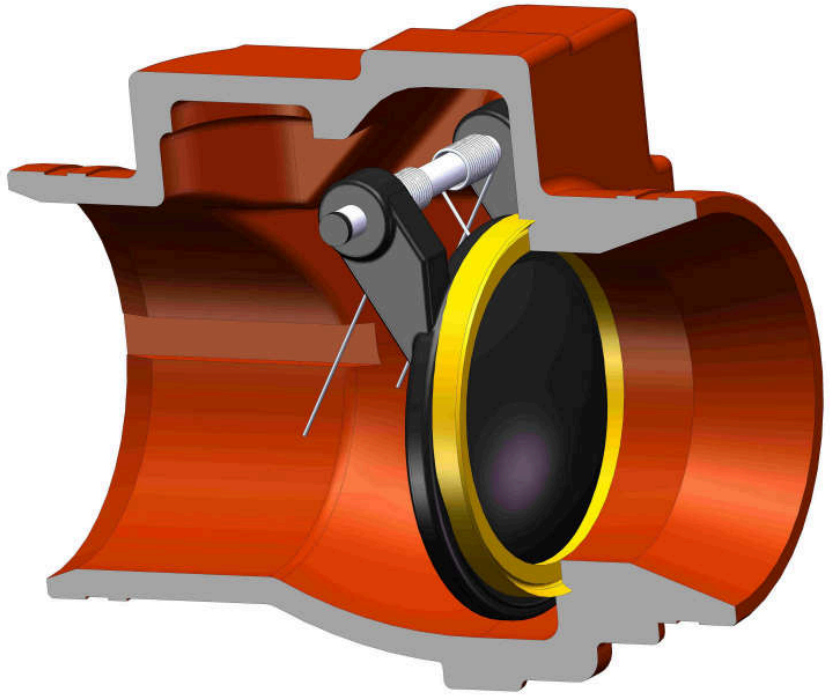

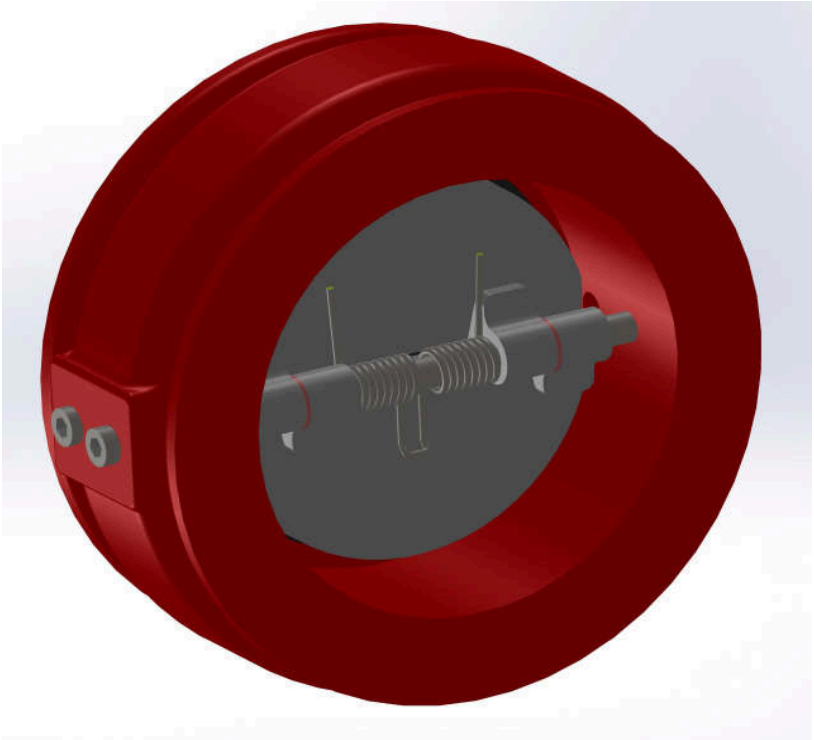

SHOTGUN RISER GROOVED CHECK VALVE

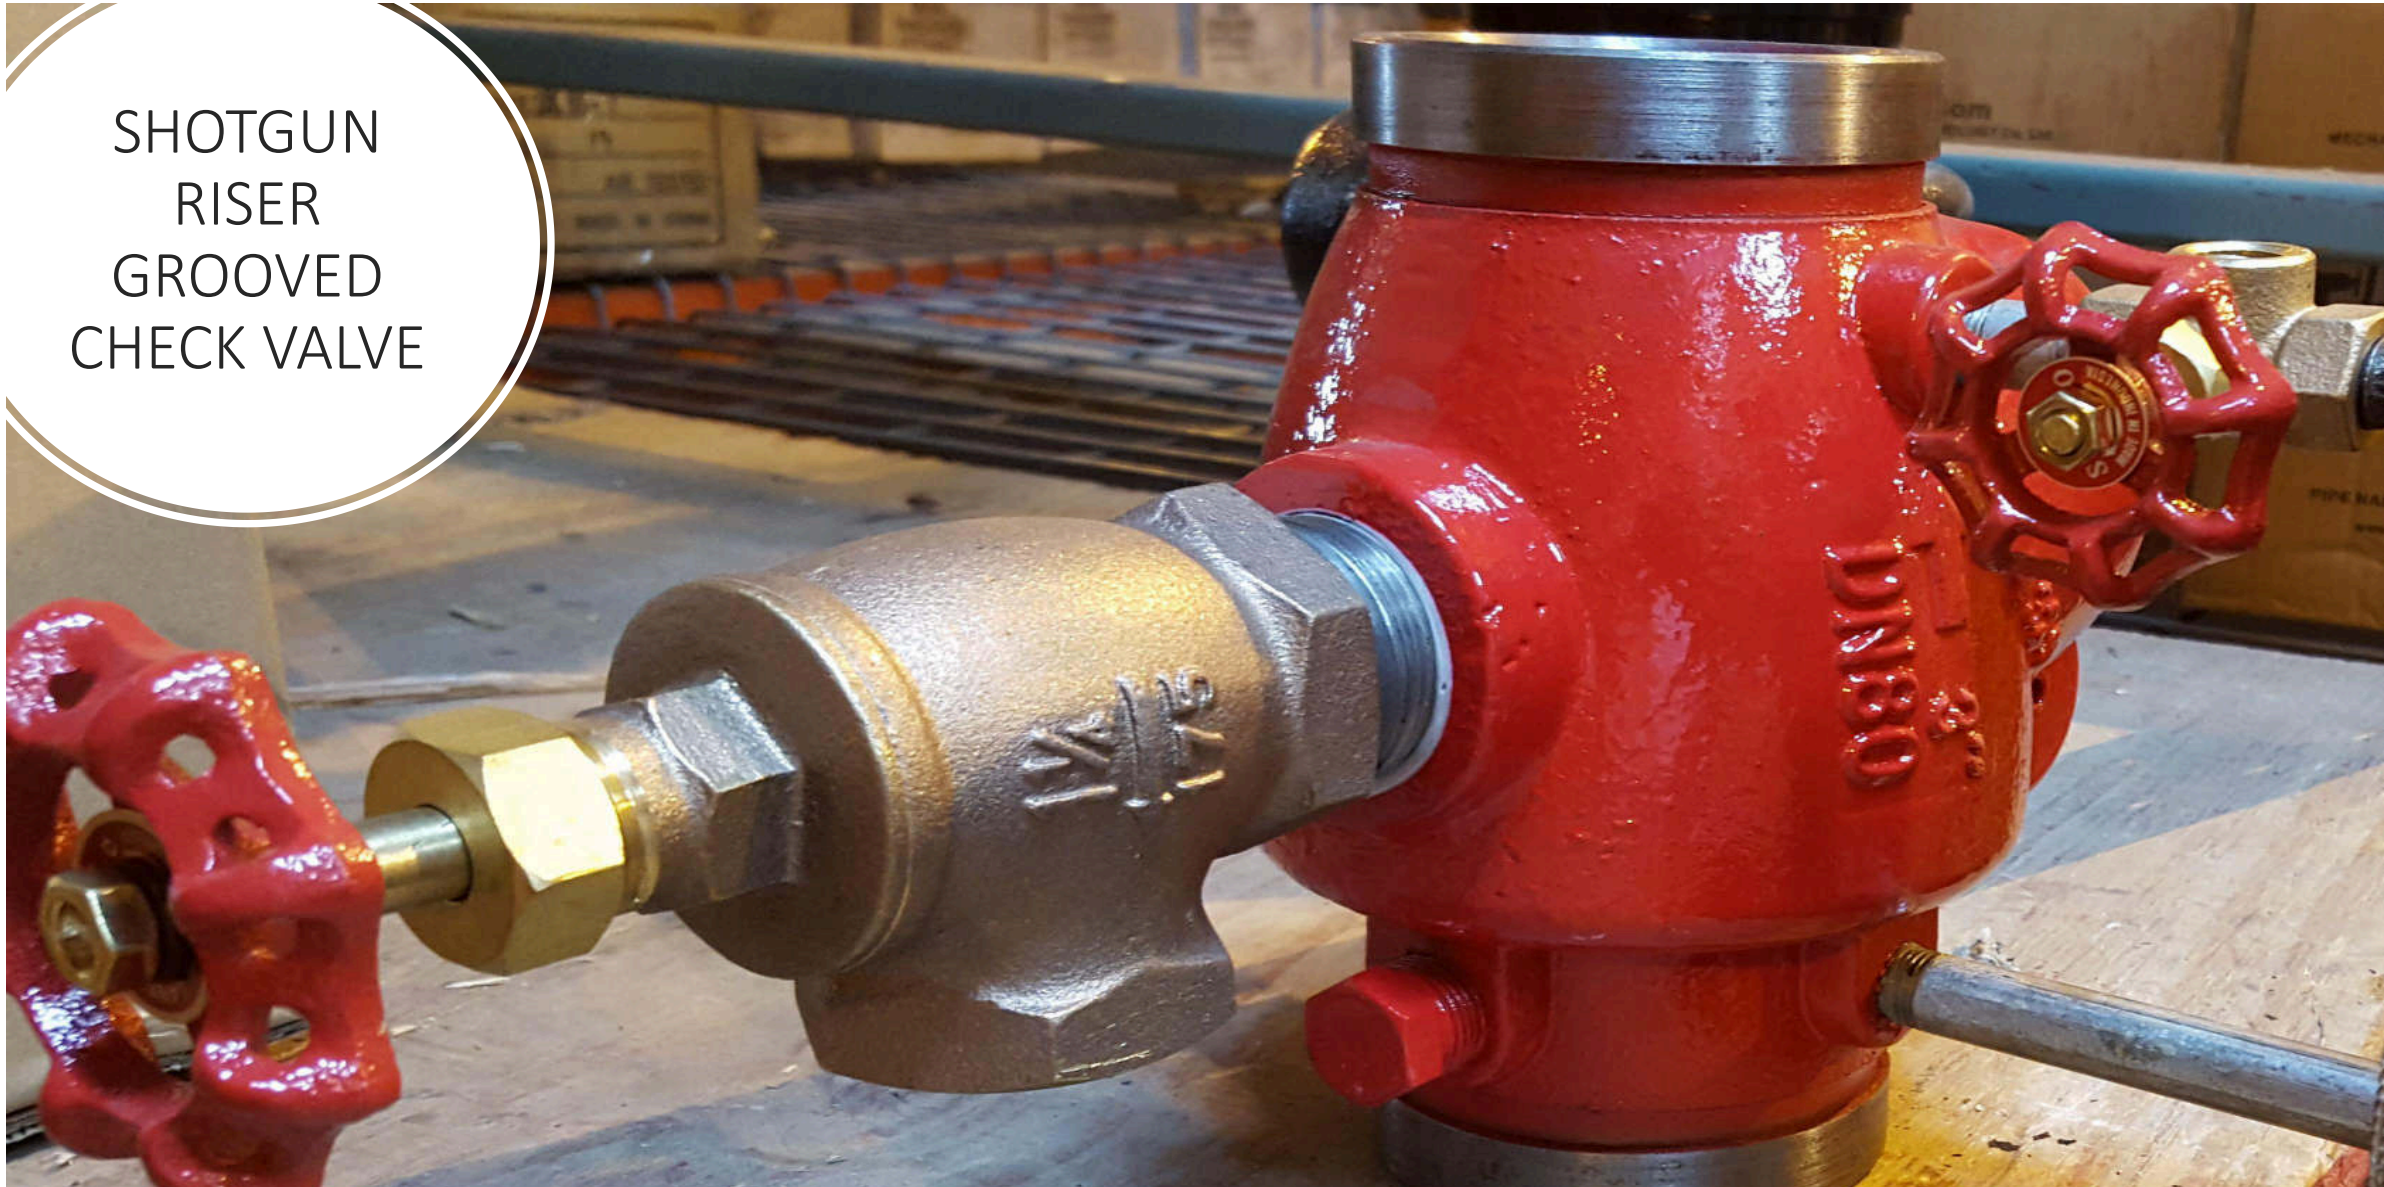

Y STRAINERS – BASKET STRAINERS





BUTTERFLY VALVES

- **UL / FM GROOVED END BUTTERFLY VALVES**
- **UL / FM WAFER STYLE BUTTERFLY VALVES**
- **WITH BUILT-IN SUPERVISORY SWITCH**
- **DUCTILE IRON DISC – EPDM ENCAPSULATED**



FIRE SPRINKLER MONITORING PRODUCTS

- **WATERFLOW DETECTORS**
- **SUPERVISORY SWITCH FOR INDICATOR POST**
- **SUPERVISORY SWITCH FOR OS&Y GATE VALVE**
- **PRESSURE SWITCH**









WATERFLOW DETECTOR

- AVAILABLE WITH ALUMINUM SADDLE OPTION
- NEW RETARD KNOB AVAILABLE
- F6001T THREADED VERSION WITH MULTIPLE PADDLES PROVIDED
- CPVC VERSION COMING SOON






ALARM CHECK VALVES

- **FLANGE x FLANGE**
- **FLANGE x GROOVED**
- **GROOVED x GROOVED**
- **UL / FM PRESSURE GAUGES**





DELUGE VALVES

- **UL LISTED 2” – 12” SIZES**
- **DIAPHRAGM STYLE VALVE**
- **MAY BE INSTALLED IN VERTICAL OR HORIZONTAL POSITION**
- **AVIALABLE WITH SPECIAL LINING AND COATING FOR USE WITH SEA WATER IN HARSH ENVIRONMENTS**

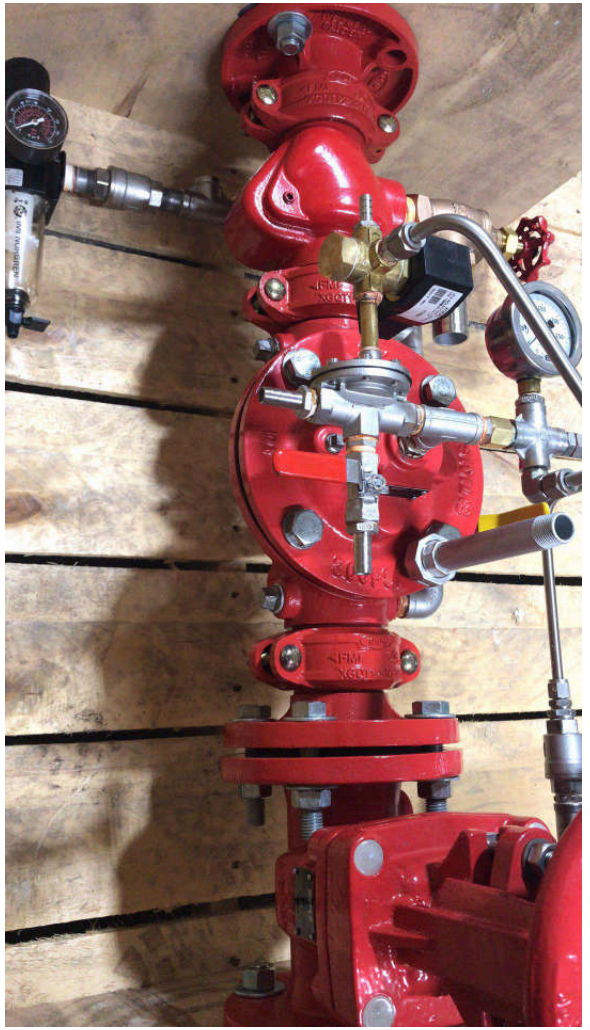

PRESSURE RELIEF AND PRESSURE REDUCING

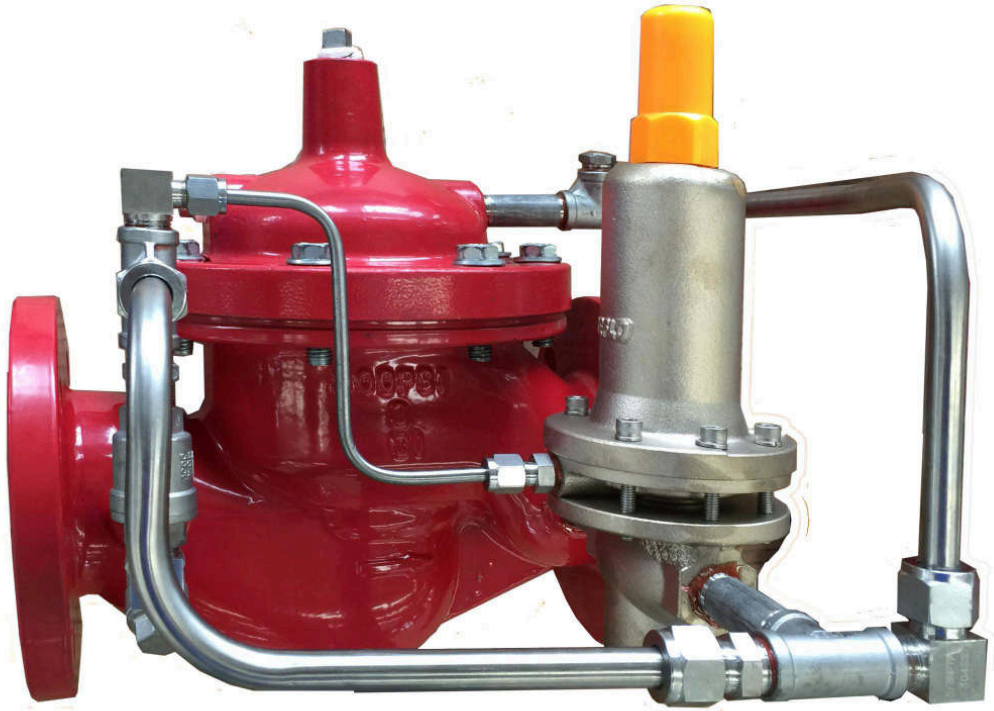

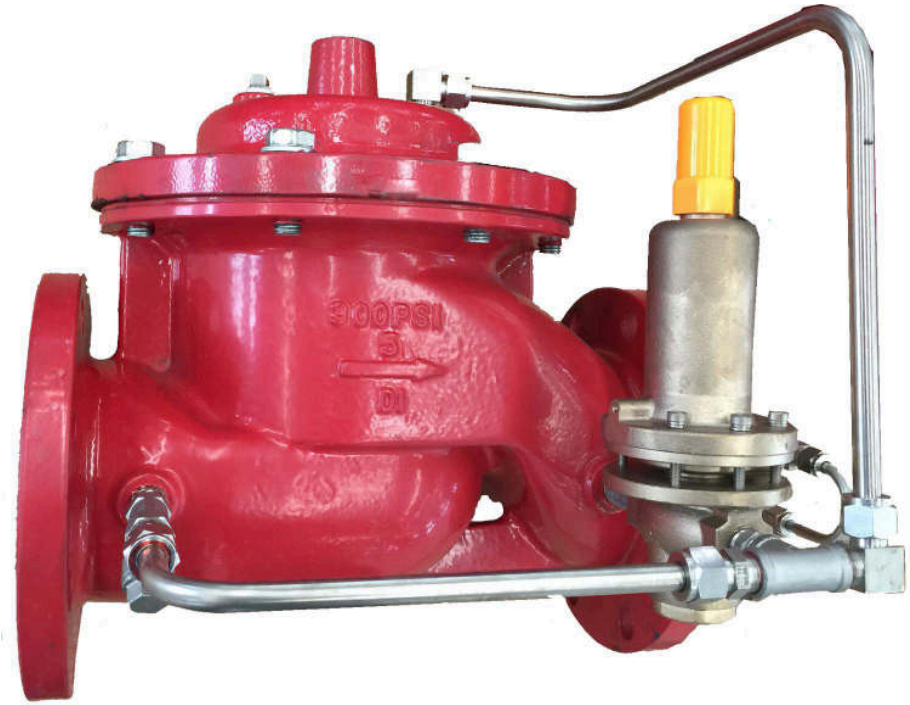

WATERWORKS GATE VALVES

- **ALL WORLDWIDE STANDARDS**
- **AWWA**
- **DIN**
- **WATERMARK**
- **FULL SIZE RANGE**



BACKFLOW PREVENTERS

- MUNICIPAL WATER SYTEMS
- AVAILABLE WITH OS&Y OR NRS SHUT-OFF VALVES
- FLANGED OR GROOVED ENDS



BUTTERFLY VALVES

- AWWA C504 STANDARD
- EN593 STANDARD
- ALL SIZES AND END CONFIGURATIONS
- ALL DISC TYPES AND SEATING



ECCENTRIC PLUG VALVES

AWWA C517 STANDARD


RESILIENT SEATED

ALL END CONFIGURATIONS




HVAC PRODUCTS – STRAINERS



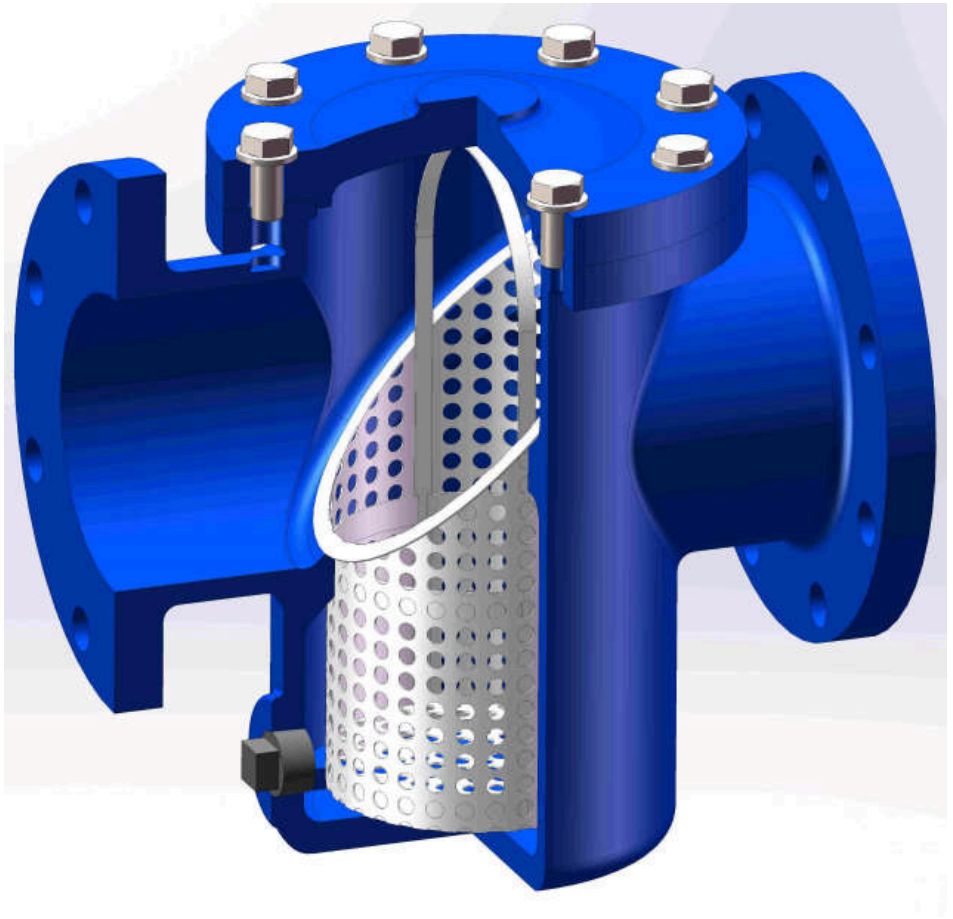


BUTTERFLY VALVES

- LUG STYLE
- WAFER STYLE
- GROOVED ENDS
- LEVER OR GEAR
- SS DISC / DUCTILE-IRON DISC

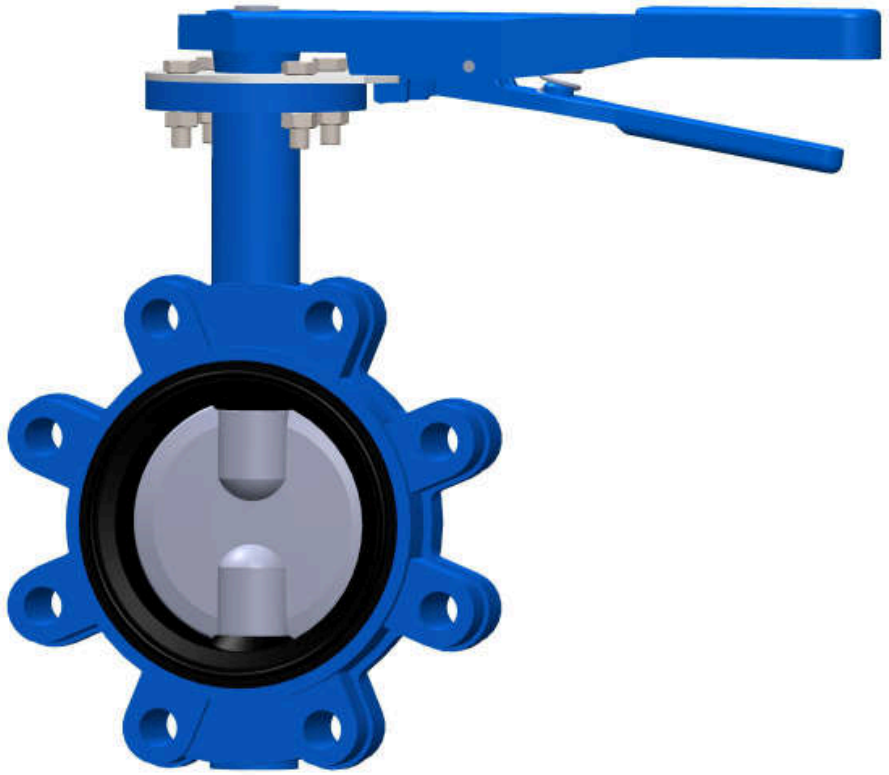

BALANCING VALVES

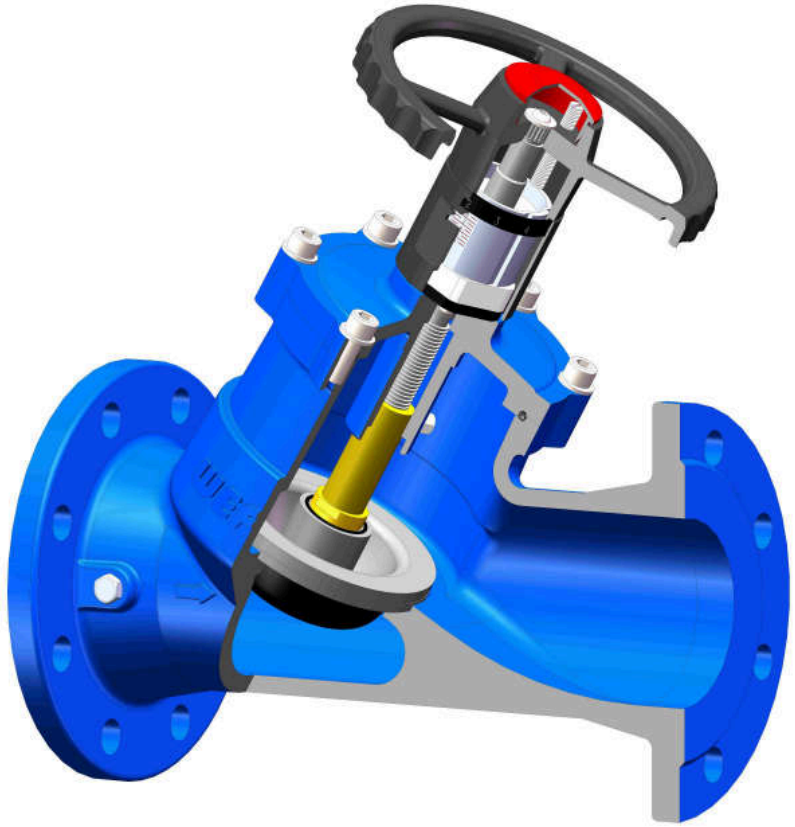

- AIR RELEASE VALVES



FOOT VALVE



SUCTION DIFFUSER







LARGE DIAMATER – OEM – SPECIALTY PRODUCTS

64” ECCENTRIC PLUG VALVE



66” OS&Y VALVE



PRIVATE LABEL – OEM PRODUCTS





MAJOR APPROVALS

















CHOOSE WEFLO

